



# CHALMERS

## Chalmers Publication Library

### **Developing hard waveguides based on gap waveguide concept**

This document has been downloaded from Chalmers Publication Library (CPL). It is the author's version of a work that was accepted for publication in:

**Metamaterials '2011, The Fifth International Congress on Advanced Elec-tromagnetic Materials in Microwaves and Optics, Barcelona, Spain, 10-15 October 2011**

Citation for the published paper:

Rajo-Iglesias, E. ; Kildal, P. ; Maci, S. (2011) "Developing hard waveguides based on gap waveguide concept". Metamaterials '2011, The Fifth International Congress on Advanced Elec-tromagnetic Materials in Microwaves and Optics, Barcelona, Spain, 10-15 October 2011

Downloaded from: <http://publications.lib.chalmers.se/publication/153400>

Notice: Changes introduced as a result of publishing processes such as copy-editing and formatting may not be reflected in this document. For a definitive version of this work, please refer to the published source. Please note that access to the published version might require a subscription.

Chalmers Publication Library (CPL) offers the possibility of retrieving research publications produced at Chalmers University of Technology. It covers all types of publications: articles, dissertations, licentiate theses, masters theses, conference papers, reports etc. Since 2006 it is the official tool for Chalmers official publication statistics. To ensure that Chalmers research results are disseminated as widely as possible, an Open Access Policy has been adopted. The CPL service is administrated and maintained by Chalmers Library.

(article starts on next page)

# Developing hard waveguides based on gap waveguide concept

E. Rajo-Iglesias<sup>1</sup>, Per-Simon Kildal<sup>2</sup>, Stefano Maci<sup>3</sup>

<sup>1</sup>Department of Signal Theory and Communications, University Carlos III of Madrid  
28911 Leganes(Madrid), Spain, email: eva@tsc.uc3m.es

<sup>2</sup>Department of Signals and Systems, Chalmers University of Technology  
41296, Gothenburg, Sweden, email: per-simon.kildal@chalmers.se

<sup>3</sup>Department of Information Engineering, University of Siena  
53100, Siena, Italy, email: macis@ing.unisi.it

## Abstract

The use of periodic elements loading rectangular waveguides to miniaturize them allowing the propagation of new (backward) modes has been proposed several years ago. However all the proposed solutions have a strong limitation in terms of bandwidth and impedance matching. We propose for the first time a wide band miniaturized waveguide based on the use of artificial surfaces and the gap waveguide philosophy.

## 1. Introduction

The big amount of work on the last decade about periodic structures, artificial surfaces and metamaterials has produced many results with revolutionary approaches in classical designs. One of the promising ideas was the possibility of using Artificial Magnetic Conductors (AMC) to emulate Perfect Magnetic Conductor (PMC) boundary condition in the vertical walls of ordinary rectangular waveguides. In this way, the propagation of a mode fulfilling boundary conditions will be possible at a frequency much lower than the ordinary cutoff which is given by the waveguide width and this lower frequency will be defined by the AMC surface. Different authors have tried to use this idea previously with relative success [1]-[5] as in all the examples in the literature, the solutions have severe problems with the bandwidth of the mode because the AMC solution was very narrow band.

Recently, a new type of technology is being developed based on related concepts. By playing with AMC and PEC conditions, the propagation of parallel plate modes is controlled and stopped in a frequency range where also two opposite PEC boundaries are allowed to permit propagation. This is known as *gap* waveguide and both the *ridge* and the *groove* versions of it have been carefully studied [6, 7, 8] in all cases implementing the AMC condition with a bed of nails. From those studies we know that the geometries allowing a gap to the metal plate give as result large bandwidths for the PMC condition. Inspired in this idea, this work proposes the initial study on how to replace two walls of a rectangular waveguide by an AMC separated a gap  $g$  from the metal. The idea is described in figure 3 where also the general idea when dealing with miniaturizing waveguides is shown. The type of AMC selected for these initial studies is the mushroom-type surface, as it is flat and fits well with this application.

## 2. Desing of the AMC surface

The first step in designing the structure is the selection of the mushroom-type periodic surface to provide the AMC condition. The structure must be analyzed with an upper metal plate as it was studied for

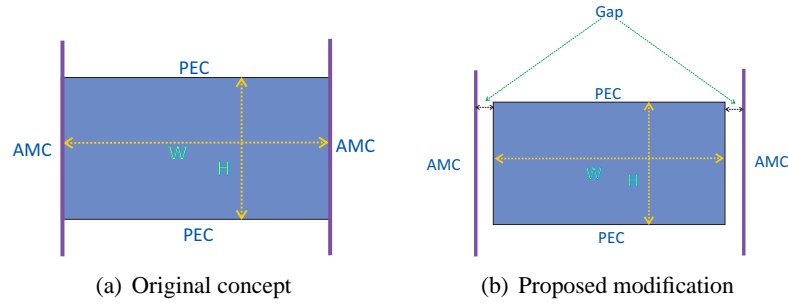


Fig. 1: Hard waveguide designs

gap waveguide designs in [9]. In this initial study we look for an structure which provides a quite wide band. According to [9] the bandwidth was mainly dependent on the thickness and permittivity of the substrate were the mushrooms are printed. A low permittivity with a relatively thick substrate gives the largest bandwidth. However, this results in considerably big mushrooms and limits the aperture size. Consequently we propose a compromise by using a material with thickness  $t=1\text{mm}$  and with permittivity  $\epsilon_r=4.4$ . We select as frequency band the one around 10GHz. The dispersion diagram will depend as well on the “gap” (the distance to the upper plate) as discussed as well in [9] and we have selected 0.5mm to this aim. Figure 2 shows the dispersion diagram for an example in which we have selected as patch size  $w=2.25\text{mm}$ ,  $p=2.5\text{mm}$  and as radius of the via  $r=0.25\text{mm}$ . With such values, the stop band goes from approximately 9GHz to 24GHz for the considered gap of  $g=0.5\text{mm}$  as shown in Figure 2.

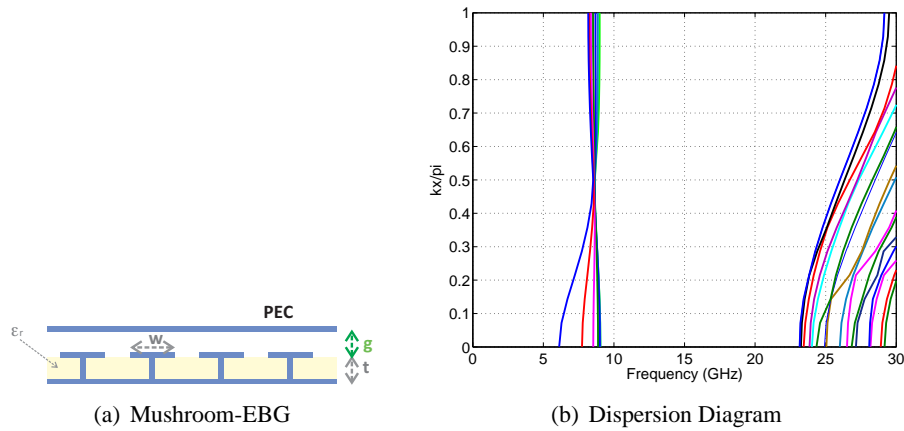


Fig. 2: Stop band defined by the mushroom-type EBG with a gap and an upper plate

### 3. Considerations of design and field distribution

The aperture of the proposed waveguide is  $W$  by  $H$  as shown in Figure ?? being both  $w$  and  $H < 0.5\lambda_0$  within the operation band. However, when some dielectric is added to the aperture we need to recompute the modes to see the cutoff frequency of the dominant one. We propose initially a waveguide with dimensions are 5 by 5 plus the gap and plus the two dielectric layers. Considering all these factors we have calculated the cutoff frequency of the dominant mode for such aperture (with PEC in the four walls) by running a simulation and the result gives 15GHz. This will be the upper limit for the band of the created mode. The dispersion diagram of the structure has been computed and is presented in Fig 3. We clearly see how all the parallel plate modes go to cutoff at around 9.6 GHz, when a new mode

starts to propagate. This frequency is determined by the mushroom-EBG structure as shown in Fig 2. The monomode band covers from approximately that frequency to almost 13.5GHz. In the same Figure the dashed lines mean the dispersion diagram for the same aperture but with height  $H=3\text{mm}$  and for this case the upper limit of this monomode band is above 15GHz.

The field distribution in such frequency range is included as well in the Figure. Both  $E$  and  $H$  fields have zero components in  $\hat{z}$  direction and the field is horizontally polarized (according to the natural way of manufacturing this by layers) and field distribution is quite uniform.

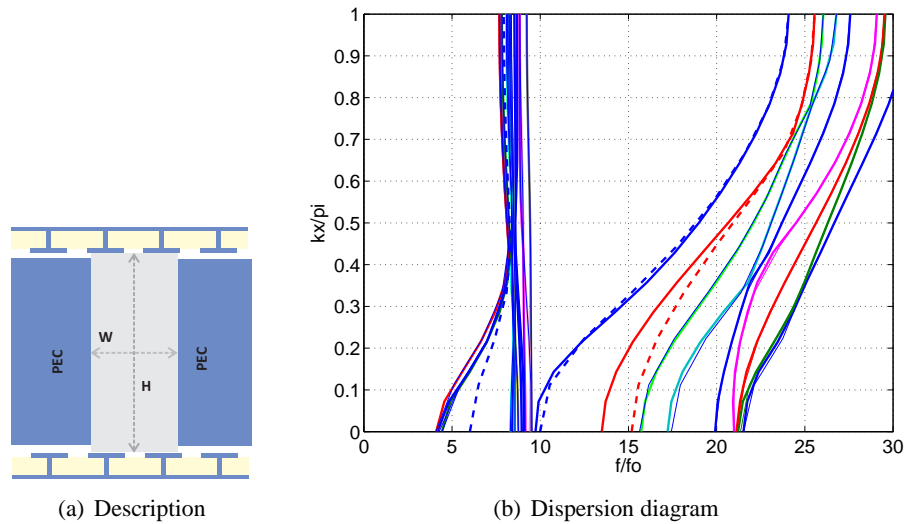


Fig. 3: Waveguide designed with the double mushroom-EBG surfaces. Aperture size is  $5 \times 5$  for solid lines and  $5 \times 3$  for dashed lines.

#### 4. Conclusion

A new geometry based on the concept of gap waveguide has been proposed to allow the propagation of quasi-TEM modes in a rectangular waveguide within a wide band. The design is based in previous works which have used AMC on the walls of the waveguide to remove the cutoff condition, but the initial studies of the proposed modification provide for the first time enough bandwidth. Besides, the design has the advantage of gap waveguides of being a contact-less technology. The results can be seen as well as the horizontally-polarized version of the ridge gap waveguide. These are preliminary results and the possibilities and limitations of this geometry are currently being investigated.

#### Acknowledgement

Part of this work has been funded by under project XXX

#### References

- [1] Kehn, M.N.M.; Kildal, P.-S.; , "Miniaturized rectangular hard waveguides for use in multifrequency phased arrays," Antennas and Propagation, IEEE Transactions on , vol.53, no.1, pp. 100- 109, Jan. 2005
- [2] Ng Mou Kehn; Nannetti, M.; Cucini, A.; Maci, S.; Kildal, P.-S.; , "Analysis of dispersion in dipole-FSS loaded hard rectangular waveguide," Antennas and Propagation, IEEE Trans. on , vol.54, no.8, pp.2275-2282, Aug. 2006

- [3] Quevedo-Teruel, O.; Rajo-Iglesias, E.; Ng Mou Kehn, M.; , "Numerical and experimental studies of split ring resonators loaded on the sidewalls of rectangular waveguides," *Microwaves, Antennas Propagation, IET* , vol.3, no.8, pp.1262-1270, December 2009
- [4] Rajo-Iglesias, E.; Quevedo-Teruel, O.; Kehn, M.; , "Multiband SRR Loaded Rectangular Waveguide," *Antennas and Propagation, IEEE Transactions on* , vol.57, no.5, pp.1571-1575, May 2009
- [5] Hrabar, S.; Bartolic, J.; Sipus, Z.; , "Waveguide miniaturization using uniaxial negative permeability metamaterial," *Antennas and Propagation, IEEE Transactions on* , vol.53, no.1, pp. 110- 119, Jan. 2005
- [6] Kildal, P.-S.; Alfonso, E.; Valero-Nogueira, A.; Rajo-Iglesias, E.; , "Local Metamaterial-Based Waveguides in Gaps Between Parallel Metal Plates," *Antennas and Wireless Prop. Letters, IEEE* , vol.8, no., pp.84-87, 2009
- [7] Kildal, P.-S.; Zaman, A.U.; Rajo-Iglesias, E.; Alfonso, E.; Valero-Nogueira, A.; , "Design and experimental verification of ridge gap waveguide in bed of nails for parallel-plate mode suppression," *Microwaves, Antennas Propagation, IET* , vol.5, no.3, pp.262-270, Feb. 21 2011
- [8] Polemi, A. and Maci, S. and Kildal, P.-S.; , "Dispersion Characteristics of a Metamaterial-Based Parallel-Plate Ridge Gap Waveguide Realized by Bed of Nails",*Antennas and Propagation, IEEE Transactions on*, vol. 59, no.3, pp.904-913, March 2011.
- [9] Rajo-Iglesias, E.; Kildal, P.-S.; , "Numerical studies of bandwidth of parallel-plate cut-off realised by a bed of nails, corrugations and mushroom-type electromagnetic bandgap for use in gap waveguides," *Microwaves, Antennas Propagation, IET* , vol.5, no.3, pp.282-289, Feb. 21 2011